

400i



The Future of Fume Extraction



FEATURES

- Clear & informative graphic display
- Highest grade HEPA and carbon technology
- Automatic electronic flow control - maintains a constant extraction rate even as the filter blocks
- Gas and particle sensors to warn the operator
- Adjustable airflow

SPECIFICATIONS

Voltage	120v	230v
Volume Part Number	0LX4013D	0LX4010D
Vacuum Part Number	080411ID	080410ID
Wattage	1.2kW	1.2kW
Frequency	50Hz / 60Hz	50Hz / 60Hz
Cabinet Height	1070mm	1070mm
Cabinet Width	465mm	465mm
Cabinet Depth	528mm	528mm
Cabinet Weight	60kg	60kg
Sound Level	<60dBa	<60dBa
Airflow	400m ³ /h	400m ³ /h

INCLUDED AS STANDARD...

FILTERS



Main Filter
Code
113505

Description
HEPA/Chemical



Pre-filter
Code
111057

Description
F6 Labyrinth

Find out more:



www.purex.co.uk



purex@purex.co.uk



+44 (0)1405 746030

CONNECTION KIT

*Connection kit is included
see overleaf for options*

Machine Supplied With • 1 x Main Filter • 1 x Pre-filter • 1 x Connection Kit • 1 x Power Cable • 1 x Manual

OPTIONS

Main Filter

Code:	Description:
113505H	HEPA/Chemical (Hydrophobic)
113579	HEPA/Twin Chemical
113668	HEPA/Twin Chemical
113512	HEPA/Chemical (Cleanroom)
113669	HEPA/Chemical (Cleanroom)
113508	Chemical
113809	HEPA
113513	Solvent Lock

Main Filter

Code:	Description:
113662	Chemical Special
113505P	Chemical Special
113531	Pleated Bag
113504	HEPA/Chemical Special

Pre-filter

Code:	Description:
111097	F8/F9 Labyrinth

Connection Kits

Hose End
Diameter

Hose
Length


Purex Inlet
Diameter

Code: 100032

50mm

3m

80mm




Code: 100043

50mm

6m

80mm




Code: 120299

80mm

3m

80mm




Code: 120288

100mm

2.3m

80mm

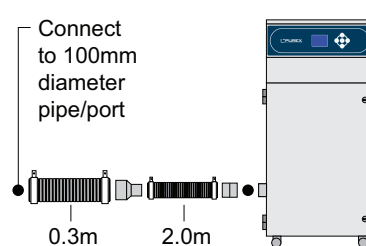


Code: 120297

100mm

2m

80mm

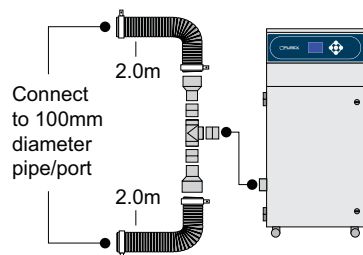


Code: 100171

125mm

3m

80mm

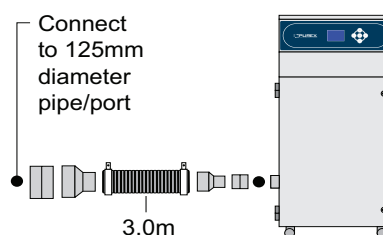

If you do not see a connection kit that fits your machine or pipework, please contact Purex or your representative

Interfacing



Interfacing can remotely start the Purex machine when the connected machine starts.

Interfacing can also warn the connected machine when the Purex machine is in alarm.

Take a look through our Interfacing Guide to see our extensive range of options



Purex International Limited
QWP House, Island Drive
Capitol Park, Thorne
Doncaster, UK
DN8 5UE